

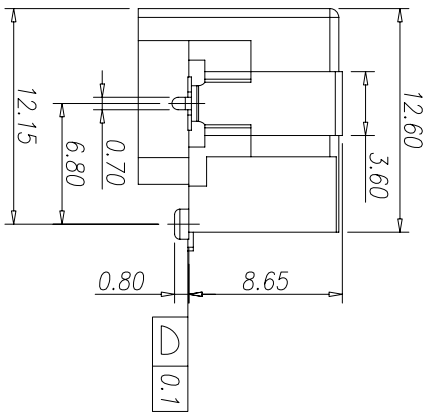


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 8P8C, 1X1PORT	MJ88-BX11-HRV33-X

料号由原 MJ88-BX11-HRV33
变更为 MJ88-XX11-HRV33-X



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A02		新增电镀规格	XSY	2015.07.09
A03		新增包装选项	XSY	2016.05.06
A04		增加产品颜色选项	XSY	2017.04.04
A05		增加产品颜色选项	XSY	2017.04.12

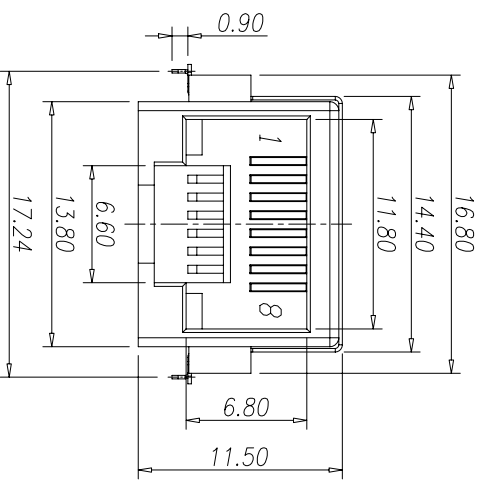

SPECIFICATIONS:

1. Voltage: 150V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 40mΩ MAX.
4. Insulation Resistance: 500MΩ MIN.
5. Dielectric Withstand Voltage :1000V AC
6. Operate Temperature: -40°C~80°C
7. Durability: 500 Mating Cycles MIN.

Part No.:

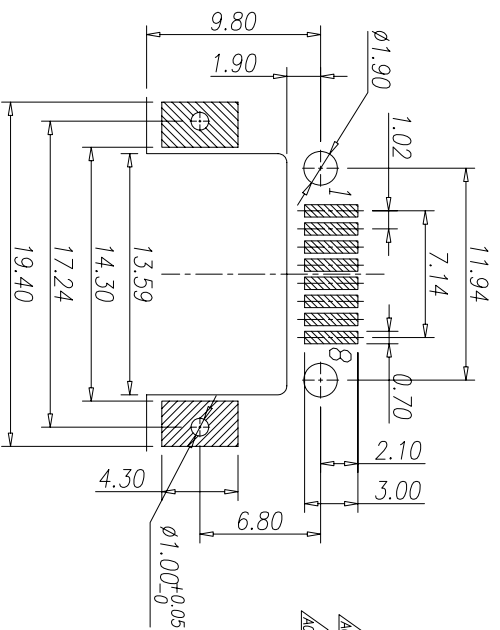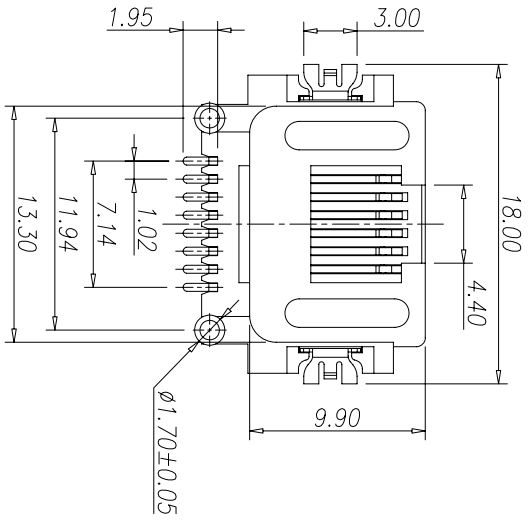

Recommend PCB Layout
(Lack Top View)
Tolerance: $\pm 0.05\text{mm}$

Table 1

X	Color	housing Material
B	Black	LCP UL94V-0
U	Blue CX018	PA9T UL94V-0
5	Green	PA9T UL94V-0

X	包装方式
C	卷带包装
P	吸塑盒包装


X	Terminal Plating
0	Au 1U" Plating
1	Au 3U" Plating
2	Au 6U" Plating
3	Au 15U" Plating
4	Au 30U" Plating
5	Au 50U" Plating

A		B		C		D	
c	Shielding	1	Brass				
b	Terminal	8	Phosphor Bronze				
a	Housing	1	See Table 1				
NO.	PART NAME	Q'TY	MATERIAL				

3		2	
	Ni Plating		Remark
	Au/Tin Plating		
	See Table 1		
	PLATING & COLOR		

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:	SCALE: 1/1	UNIT: mm	DWG. NO:
X : ±0.5	X : ±2°	A3	PAGE: 1 OF 1	WI-061-011
X.X : ±0.3	X.X : ±1'	REV: A05	CHECKED BY	PREPARED BY
X.XX : ±0.2		DICK	XSY	XSY


东莞市合陵電子有限公司
 Dongguan Heling Electronic Co.,LTD

CUSTOMER COPY